




Technical data

Name	Working press. MPa	Eff. oil vol. cm ³	Cap. cm ³ /stroke	Pump force N	Pressure-conn.	Return-conn.	Gauge	Length mm	Width mm	Height mm	Weight kg
PH60-500	60	500	2.4	410	G 1/4"	--	*	540	70	130	3.8
PH60-1000	60	1000	2.4	410	G 1/4"	G 3/8"	*	634	62	140	5.6
PH70-500	70	500	2.4	480	G 1/4"	--	*	540	70	130	3.8
PH70-1000	70	1000	2.4	480	G 1/4"	G 3/8"	*	634	62	140	5.6
PH80-500	80	500	2.4	550	G 1/4"	--	*	540	70	130	3.8
PH80-1000	80	1000	2.4	550	G 1/4"	G 3/8"	*	634	62	140	5.6

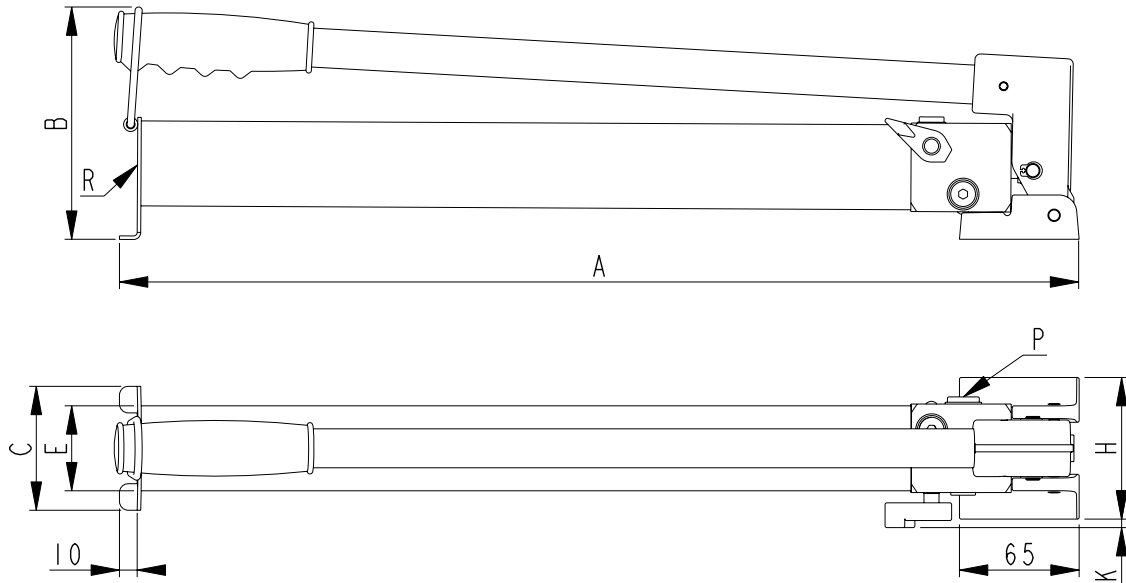

Name	Working press. MPa	Eff. oil vol. cm ³	A mm	B mm	C mm	E mm	H mm	K mm	P press. con.	R return con.
PH60-500	60	500	540	130	70	48	80	5	G 1/4"	--
PH60-1000	60	1000	634	140	62	58	80	5	G 1/4"	G 3/8"
PH70-500	70	500	540	130	70	48	80	5	G 1/4"	--
PH70-1000	70	1000	634	140	62	58	80	5	G 1/4"	G 3/8"
PH80-500	80	500	540	130	70	48	80	5	G 1/4"	--
PH80-1000	80	1000	634	140	62	58	80	5	G 1/4"	G 3/8"



www.nikehydraulics.com

NIKE HYDRAULICS AB
 Box 1107
 631 80 Eskilstuna
 SWEDEN
 Tel +46 16 - 16 82 00
 Fax +46 16 - 13 93 16
 info@nikehydraulics.se

NIKE HYDRAULICS Inc.
 3980 W. Albany, Unit #1
 MCHENRY, IL 60050
 USA
 Tel + 1 815 385 7777
 Fax + 1 815 385 7776
 info@nikehydraulics.com

NIKE POWER EQUIPMENT Ltd.
 Unit 6, Stechford Trading Estate
 Lyndon Road, Stechford
 BIRMINGHAM B33 8BU, UK
 Tel +44 121 789 77 07
 Fax +44 121 789 68 66
 info@nikehydraulics.co.uk